

LP[®] 650

Simply designed to be shared.



EASY TO SUPPORT new projector design with standardized keypads, menus and interchangeable remotes. Easy to use, easy to share, easy to support

COLOR-CODED CONNECTIONS color-coded cables and velcro straps plug into matching color-coded ports

BRIGHT, CAPTIVATING IMAGES 2500 ANSI lumens fill the screen producing bright, captivating images

WHISPER QUIET 35dB insure the only thing heard is your message

PROJECTORNET™ manage the LP650 over your corporate network

FLEXIBLE IMAGE PLACEMENT the zoom lens allows a change in image size of up to 40% so images fit the screen perfectly from wherever the projector is located

InFocus® LP650

WHERE SOPHISTICATED DESIGN MEETS SIMPLE CONTROL

The LP650 was designed around a new way of thinking and its like nothing you've ever seen before in projector design. An intuitive standardized keypad with everything users need, right on top of the projector. No need for directions, manuals, or IT support calls. With color-coded connections and cables users can connect the projector in seconds. The keypad is grouped by function and simple to use—whether users want power, source selection or fine-tuning. And for further ease of operation, users can rely on intuitive, icon-based menus—they simply scroll and select. Standardized, interchangeable remotes mean seamless projector control across all InFocus projectors. No need for directions, manuals, or IT support calls. A built-in handle makes it easy for anyone to carry the projector or switch rooms at a moment's notice. With the

LP650, choosing to standardize on InFocus, the worldwide leader in digital projection, couldn't be an easier choice.


FULLY EQUIPPED AND LOADED WITH OPTIONS

The InFocus LP650 has it all. Connect up to five sources simultaneously—2 computer, 3 video for seamless switching and simple content integration. With the optical zoom lens on the LP650—flexibility in image size and projector placement have never been easier. Images can be

enlarged up to 40% in size with the 1.4:1 optical zoom lens—and with the digital pan/zoom users can highlight an area of the screen at the touch of a button. The LP650 ships standard with the Conductor™ Plus remote, one of three new optional remotes to make projector control seamless. The LP650 also ships with a new molded case that organizes the projector and accessories like a toolbox, putting an end to missing parts



Digital/Analog Computer
mouse and flash with audio

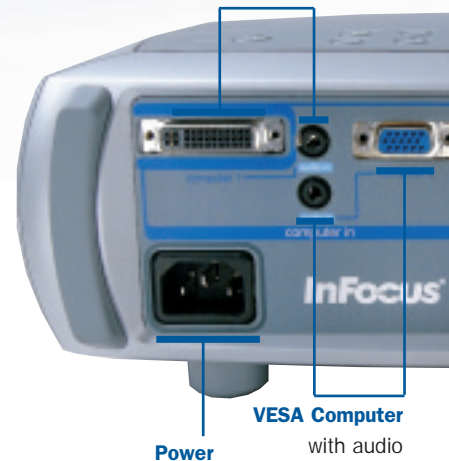

and cables. Using the color-coded slots for cables and parts—the user can quickly pack everything into the case. Anyone using the projector will know at a glance if something is missing.

INTEGRATING INTO YOUR WORLD

With InFocus ProjectorNet™ software, you can command and control the LP650 over your existing networks. Designed as a snap-in to the Microsoft® Management Console, InFocus ProjectorNet provides unique control features allowing for centralized



LEADERSHIP BUILT ON QUALITY

InFocus Corporation is the worldwide leader in digital projection. That's why the most demanding businesses insist on InFocus for unquestionable reliability engineered into the most streamlined machine.

SERVICE YOU CAN COUNT ON

For outstanding service and support that's there when you need it, InFocus Corporation's service programs offer you peace of mind — it's customer care you can count on. For more information on service program details for your region, please visit

www.infocus.com/service/service_offerings



Exclusive InFocus Organizer molded carry case

PROJECTION DISTANCE/IMAGE SIZES*

Distance to Screen	Min. Diagonal Image Size	Max. Diagonal Image Size
5.0'	1.5m	2.4' / 0.7m
10.0'	3.0m	4.8' / 1.5m
15.0'	4.6m	7.2' / 2.2m
20.0'	6.1m	9.6' / 2.9m
30.0'	9.1m	14.4' / 4.4m
32.8'	10.0m	15.7' / 4.8m

* Image diagonal divided by throw distance ranges from .48 (tele) to .67 (wide) typical.

Ships Standard With Projector:

- **Exclusive InFocus Organizer molded carry case**
- **Conductor™ Plus full-featured remote with laser pointer**
- **Color coded cable straps**
- **M1-D/A analog computer cable with USB**
- **3.5mm computer audio cable**
- **RCA audio/video cable**
- **Power cord**
- **User manual, quick start card and CD**

Optional Accessories

- ATA Shipping Case
- Deluxe Travel Case
- Digital/Analog Interface Card
- Digital Computer Cable
- Presenter™ presenter remote with laser
- Integrator™ systems remote with laser
- Mindpath RF Remote
- GyroMouse RF Remote
- Ceiling Mount Kit
- PC Guardian Projector Cable Lock
- 50" Portable Projection Screen
- 60" Deluxe Insta-Theatre Screen
- 84" Pull-Down Screen
- Replacement Lamp

TECHNICAL SPECIFICATIONS

Native Resolution	• XGA 1024 x 768
Display Technology	• DLP by Texas Instruments 0.7" XGA DMD DDR
Input Sources	• Computer 1 (M1D/A with 3.5mm audio), computer 2 (VESA with 3.5mm audio), video 1 (S-Video), video 2 (RCA), video 3 (component RCA), stereo audio (RCA), RS-232, NIC (RJ45)
Output Sources	• Stereo audio (RCA), monitor out (VESA)
Computer Compatibility	• SXGA, XGA, SVGA, VGA, MAC, 1080i/720p HDTV
Video Compatibility	• Full NTSC, PAL, SECAM, EDTV (480p, 576p), HDTV (720p, 1080i)
Brightness Standard Mode	• 2500 lumens
Brightness Uniformity	• +30 / -40
Contrast Ratio	• 800:1
Number of Colors	• 16.7 million colors
H-Synch Range	• 50 – 117 Hz
V-Synch Range	• 50 – 85 Hz
Dot Clock:	• 135 MHz
Lens Shift	• None
Digital Keystone Correction	• +/- 20 degrees
Projection Lens	• Manual zoom lens
Throw Ratio	• 1.4:1
Minimum Projection Distance	• 5' (1.5 m)
Maximum Projection Distance	• Greater than 32.8 (10.0m)
Aspect Ratio	• 4:3
Image size (diagonal)	• 2.4' to greater than 22' (0.7m to greater than 6.7m)
Projection Methods	• Front, rear and ceiling
Audio	• 4.0 Watt stereo
Projector Control	• Menu, Keypad, Projector Manager, RS-232, NIC (RJ45)
Mouse Control	• USB
Lamp	• 250 W UHP/1500 hours
Dimensions (standard)	• 4.3" (H) x 13.8" (W) x 12.8" (L) 110mm (H) x 351mm (W) x 325mm (L)
Weight (standard)	• 9.35 lbs/4.24 kg
Power Consumption	• 350 Watts
Power Supply	• 100V–240V at 50–60 Hz
Operating Temperature	• 10° to 35° (0 to 10,000')
Menu Languages	• English, Spanish, French, German, Japanese, Korean, Portuguese, Italian, Norwegian, Russian, Simplified Chinese, Traditional Chinese
Audible Noise	• 35dB
Approvals	• UL, CSA, TUV, C Tick, NOM, MIC, GOST, IRAM, CCC, S-JOA, FCC A, EN55022, ICES-003
Lamp Warranty	• 90 days or 500 hours, whichever comes first
Warranty	• 2 years parts and labor



Call InFocus or your dealer today to arrange a demonstration.

www.infocus.com

InFocus Corporate Headquarters:

27700B SW Parkway Avenue • Wilsonville, Oregon 97070-9215, USA
Phone: 503-685-8888 • 1-800-294-6400 • Fax: 503-685-8887

In Europe: Olympia 1 • NL-1213 NS Hilversum, The Netherlands

Phone: (31) 35 6474000 • Fax: (31) 35 6423999
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia: 238A Thomson Road • #18-01/04 Novena Square

Singapore 307684 • Telephone: (65) 6334-9005 • Fax: (65) 6333-4525

InFocus and LP are registered trademarks of InFocus Corporation. All other trademarks are used with permission or are for identification purposes only and are the property of their respective companies. ©2002 InFocus Corporation. All rights reserved. 805-0651-00. LP650_DS_E.qxd