

Desktop Projector™ 9250+

incredibly bright XGA

FIT-TO-VIEW®
image resizing improves the clarity of any scaled resolution

SMART ENOUGH TO SHARE
two computer and two video inputs accommodate multiple presenters

BRIGHTER THAN EVER
at 1900 ANSI lumens, it's one of the brightest projectors in its class

ZOOM IN, ZOOM OUT
motorized 1.3:1 zoom and 16x digital zoom provide the ultimate in projection flexibility

PORTABLE POWER
easily take it from room to room or on the road

A WINNING IMAGE
"auto image" feature automatically calibrates the picture



actual size: 10.7 in. W x 16.3 in. L x 6.1 in. H

DESKTOP PROJECTOR 9250+

To impress your audience with every detail of your high-resolution presentation, you need a multimedia projector that produces sharp, saturated images that everyone can see. Proxima's DP9250+ is the solution. The DP9250+ is now brighter than ever with 1900 ANSI lumens. The XGA resolution and intelligent Fit-to-View resizing displays exceptional image quality at any resolution. For finely detailed graphics, text, and spreadsheets, the DP9250+ is the way to present.

- 1900 ANSI lumens for exceptionally bright, clear images
- XGA (1024 x 768) resolution provides highly detailed images and support for the latest PCs
- Fit-to-View support of VGA (640 x 480) to SXGA (1280 x 1024) resolution means worry-free compatibility
- 800 TV lines of horizontal resolution with digital scaling offers superior video image quality
- motorized focus, motorized 1.3:1 zoom, and 16x digital zoom offer complete flexibility in image sizing and viewing
- Laser F/X™ remote control with built-in laser pointer and mouse control puts you in command of the computer and projector

PROXIMA®
MULTIMEDIA PROJECTORS



DP9250+

DP9250+ Set Up



Simultaneously connect two computer sources (for example, a workstation and a PC) to accommodate multiple presenters.



Adjust the power zoom and focus for vivid, large images even in well-lit rooms.


Position the Desktop Projector 9250+ anywhere in the room.



Simultaneously connect two video sources, such as a laserdisc player and VCR, to project digital video with stereo audio.

DP9250+ Projection Distances/Image Sizes

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
4.6'	1.4 m	2.5'	0.8 m	3.3'	1.0 m
8.2'	2.5 m	4.5'	1.4 m	5.8'	1.8 m
24.6'	7.5 m	13.4'	4.1 m	17.4'	5.3 m
32.8'	10.0 m	17.8'	5.4 m	23.2'	7.1 m
35.4'	10.8 m	19.2'	5.9 m	25.0'	7.6 m

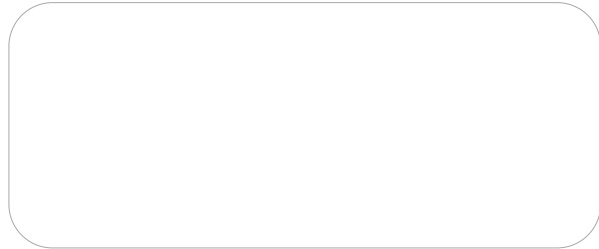

PROXIMA®
MULTIMEDIA PROJECTORS

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298,
(858) 457-5500, FAX (858) 457-9647, (800) 447-7692 (U.S. and Canada)

European Office: K.G. Meldahlsvei 9, Postboks 1403,
N-1602 Fredrikstad, Norway +47 69 34 01 55, FAX +47 69 34 06 32

www.proxima.com

www.presentersuniversity.com

Proxima and Fit-to-View are registered trademarks and Desktop Projector is a trademark of Proxima Corporation. Other trademarks are the property of their respective owners. ©1999 Proxima Corporation. All rights reserved. Specifications are subject to changes without notice.

WHAT'S INCLUDED

Model DP9250+ includes:

- Laser F/X wireless remote control with mouse control
- U.S. and European power cords
- Product documentation, registration card
- VGA cable, audio cable (mini-plug), Mac adapter, PC serial, PS2 and Mac control cables, AV cable, and S-video cable
- Lens cap, dust cover

ORDERING INFORMATION

Model Number: DP9250+ For worldwide use

Optional Accessories

CASE-001	Carry-on rolling soft case
CASE-013	Deluxe rolling hard case (checkable/shippable)
CASE-014	High capacity rolling hard case (checkable/shippable)
LAMP-014	150 watt UHP replacement lamp
A9200-BNC/SGI/SUN	Workstation connection kits

TECHNICAL SPECIFICATIONS

Display Technology	▪ 1.3" polysilicon TFT LCD x 3 with micro lens
Resolution	▪ XGA 1024 x 768
Resolutions Supported	▪ XGA (1024 x 768), Fit-to-View display of VGA (640 x 480), SVGA (800 x 600), SXGA (1280 x 1024)
Brightness	▪ 1900 ANSI lumens
Contrast Ratio	▪ 350:1 (full on, full off)
Computer Compatibility	▪ IBM PC, PS/2, Pentium and Compatibles ▪ SUN, SGI, IBM, HP, DEC, and X-Terminals ▪ Apple Macintosh, Power Macintosh, and PowerBook families
Video Compatibility	▪ NTSC, NTSC 4.3, PAL, PAL-M, SECAM
Sources	▪ 2 computer, 2 audio, 2 video or 1 S-video
H-Sync Range	▪ 15 to 100 KHz
V-Sync Range	▪ 50 to 100 Hz
Dot Clock	▪ 160 MHz
Horizontal Resolution	▪ 800 TV Lines
Aspect Ratio	▪ std: 4:3 - wide: 16:9
Image Size Diagonal	▪ 2.5 ft to 25 ft (.8 m to 7.6 m)
Lens	▪ Power zoom and focus lens, 1.3:1 ratio ▪ Focal length: 48.4 mm to 62.8 mm, F 1.8 to F 2.1
Projection Distance (From Screen)	▪ 4.6 ft to 35.4 ft (1.4 m to 10.8 m)
Keystone Correction	▪ 11°
Number of Colors	▪ 16.7 million
Lamp	▪ 150 watt UHP ▪ Lamp life: 2,000 hours to 50% brightness
Audio	▪ 2W + 2W RMS stereo
Remote Control	▪ Laser F/X wireless IR remote with mouse control and laser pointer
Dimensions	▪ 10.7 in W x 16.3 in L x 6.1 in H (27.2 cm W x 41.2 cm L x 15.4 cm H)
Weight	▪ 14.3 lbs. (6.5 kg)
Power Consumption	▪ 250 watts
Power Requirements	▪ 100 to 120V / 220 to 240V at 50/60 Hz
Operating Temperature (Sea Level)	▪ 41° F to 95° F (5° C to 35° C)
Approvals	▪ FCC Class A, UL, c-UL, CE
Warranty	▪ Two year parts and labor (excluding lamp)

