



ULTRALIGHT X350

light, bright and smart

UNMATCHED BRIGHTNESS

1100 ANSI lumens brightness make it the clear three-pound choice

DVI/I DIGITAL CONNECTION

for pure digital or standard VGA connectivity

MODULAR DESIGN

optimized for portability and upgradeability

QUIET PLEASE!

at less than 32 dB, it's the quietest projector in its class



TRUE XGA RESOLUTION

adapts directly to the source without image conversion or distortion

SMART ELECTRONICS

AND SOFTWARE

fully-digital for ease-of-use and flexibility

PROXIMA ULTRALIGHT[®] X350 FEATURES

The world's most complete 3 lb. projector is more than cute—it's revolutionary! At 1100 ANSI lumens, the fully-digital, fully-loaded Proxima UltraLight X350 helps you share information and collaborate in any environment. Whisper-quiet operation ensures that your message gets heard, and exceptional connectivity to a laptop, PC, DVD player, VCR, or Personal Digital Assistant (PDA) provides high performance in any application. Plus, its modular design offers outstanding flexibility and unbeatable upgrade potential. Delivering unmatched brightness for installations and go-anywhere size for the road, the UltraLight X350 is the smart solution for anyone who needs a projector to stay and go!

- at 1100 ANSI lumens, it's ideal for use in any environment
- at just 3.5 pounds, it offers the utmost in portability, with the smartest digital features
- whisper-quiet operation at less than 32 dB
- XGA (1024 x 768) resolution and Digital Light Processing™ technology lets you display your most detailed images with clarity
- Digital Visual Interface (DVI/I) allows pure digital connectivity for emerging standards, while also supporting current PCs through VGA
- modular design supports future upgrades and video module offers the flexibility to connect to a video source or to remove the component when displaying computer images only for the lightest load possible
- video module port replicates DVI/I and USB, in addition to supporting RCA, S-video, and one-watt stereo speaker
- equipped for Kensington® lock hardware to protect the X350 from theft
- comes with 90-day lamp warranty and two years of free ProXchange™ service for overnight projector replacement in the unlikely event that your X350 is in need of repair

FULLY-DIGITAL, SMART ELECTRONICS

- auto source selection
- auto image optimization
- auto Room Light Sensing instantly senses room light conditions and adjusts brightness and contrast for optimized image
- thermal adaptive cooling

INTELLIGENT SOFTWARE FOR EASY PROJECTOR CONTROL


- USB port offers control of projector functions and hot mouse connection
- Projector Manager allows source switching, power and screen saver management
- icon-based menu system for simple user interface

X350 TECHNICAL SPECIFICATIONS

Native Resolution	• XGA (1024 x 768)
Resolution Supported	• VGA (640 X 480), SVGA (800 X 600), XGA (1024 X 768), SXGA (1280 X 1024)
Brightness	• 1100 ANSI lumens
Brightness Uniformity	• 80%
Contrast Ratio	• 500:1 (full on full off)
Computer Compatibility	• IBM or compatibles • Apple Macintosh
Video Compatibility	• PAL BGHI, N, combination N, M, NTSC M, N, 4.43, Japan, SECAM, MESECAM
Display Technology	• Single-chip DLP
Input Sources (base unit)	• Supports DVI, VGA and USB
Input Sources (video module)	• S-video, composite video and audio • DVI, VGA and USB (port replicated from base unit)
Output Sources (video module)	• Audio
H-Sync Range	• 15 -100 KHz
V-Sync Range	• 43.5 - 130 Hz
Bandwidth	• 12 -140 MHz
Horizontal Resolution (TV Lines)	• 1024
Keystone Correction (Digital)	• +/- 6 ° Digital /12 ° Optical offset
Projection Lens	• 1.3:1 Zoom Lens
Projection Distance	• 4.3 ft. to 19.7 ft. (1.3 m to 6.0 m)
Aspect Ratio	• 4:3 (Includes some 16:9 support)
Image Size (Diagonal)	• 1.9 ft. to 14.4 ft. (0.6 m to 4.4 m)
Throw Ratio	• 1.71 - 2.86:1
Audio	• 1 Watt speaker in module
Remote Control	• BatMouse IV with laser pointer and mouse support
Lamp (Life)	• 120 watt (2000 Hours)
Dimensions (H x W x L)	• 2.36 in. x 7.12 in. x 8.42 in. • 60 mm x 181 mm x 214 mm (base unit only)
Weight	• 1.5kg/3.5 lbs.
Power Consumption	• Operation: < 170 watts; stand by: < 5 watts
Power Requirements	• 85-264VAC, 47-63 Hz
Operating Temperature	• 5 - 35° C at sea level • 5 - 30° C 3000 m • 41 - 95° F at sea level • 41 - 86° F 10000 ft.
On-Screen Menu Languages	• English, French, Spanish, Portuguese, German, Italian, Chinese, Japanese, Norwegian
Audible Noise	• <32 db nominal room conditions
Approvals	• CE, UL, CUL, FCC Class A Subpart J, Part 15
Warranty	• two years on parts and labor • 90 days (or 500 hours) on lamp • two years of free ProXchange replacement service

UltraLight X350 Set Up

Position the UltraLight X350 anywhere in the room.

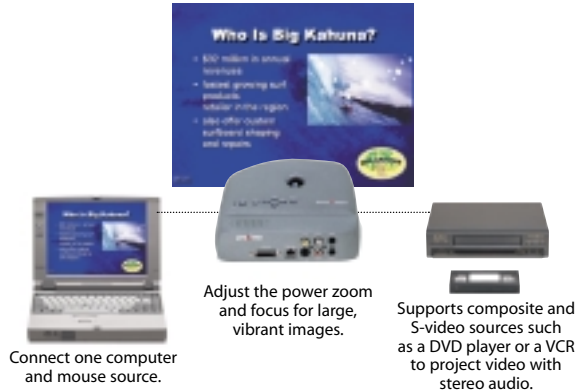

WHAT'S INCLUDED

- Remote control with mouse control and laser pointer
- U.S. and European power cords
- Product documentation
- Computer DVI/I to VGA cable, Computer DVI/I to DVI cable, AV cable, S-video cable, USB cable (for mouse control), audio cable — all with color coded connectors for easy set-up
- Projector Manager CD-ROM
- Soft carrying case
- Lens cap

ORDERING INFORMATION

Model Number	
X350	For worldwide use
Optional Accessories	
CASE-801	Samsonite rolling soft carry-on
CASE-802	Samsonite compact carry-on rolling soft case
CASE-182	Compact rolling hard case
CASE-193	Deluxe rolling hard case
A650	50 in. portable tabletop screen
LAMP-027	120-watt lamp

X350 PROJECTION DISTANCES / IMAGE SIZES

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
4.3'	1.3 m	1.9'	0.6 m	3.1'	1.0 m
6.6'	2.0 m	2.9'	0.9 m	4.8'	1.5 m
9.8'	3.0 m	4.3'	1.3 m	7.2'	2.2 m
13.1'	4.0 m	5.7'	1.7 m	9.6'	2.9 m
16.4'	5.0 m	7.2'	2.2 m	12.0'	3.7 m
19.7'	6.0 m	8.6'	2.6 m	14.4'	4.4 m



proxima
Own your audience.

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298
(858) 457-5500, FAX (858) 457-9647, 1.888.PROXIMA (U.S. and Canada)
Latin America Office: La Concepcion 322, Oficina 503, Comuna de Providencia, Santiago de Chile
[tel] (011) 562.236.1834 [fax] (011) 562.235.9321
Canadian Office: 20 Barker Court, Markham, Ontario, L3P 3X8, Canada
[tel] 905.471.4620, [fax] 905.471.5524

www.proxima.com

Proxima and Proxima UltraLight are registered trademarks and ProXchange is a trademark of Proxima Corporation. DLP and Digital Light Processing are trademarks of Texas Instruments. ©2000 Proxima Corporation. All rights reserved. Specifications are subject to change without notice. 10/00 709-00862-1 X350 data sheet.qxd

MOBILE/ULTRALIGHT

OWN YOUR AUDIENCE

proxima

www.proxima.com
1.888.PROXIMA

UltraLight Projectors

ULTRALIGHT X350